


NOR820

NORSOUND BY NORSEAL

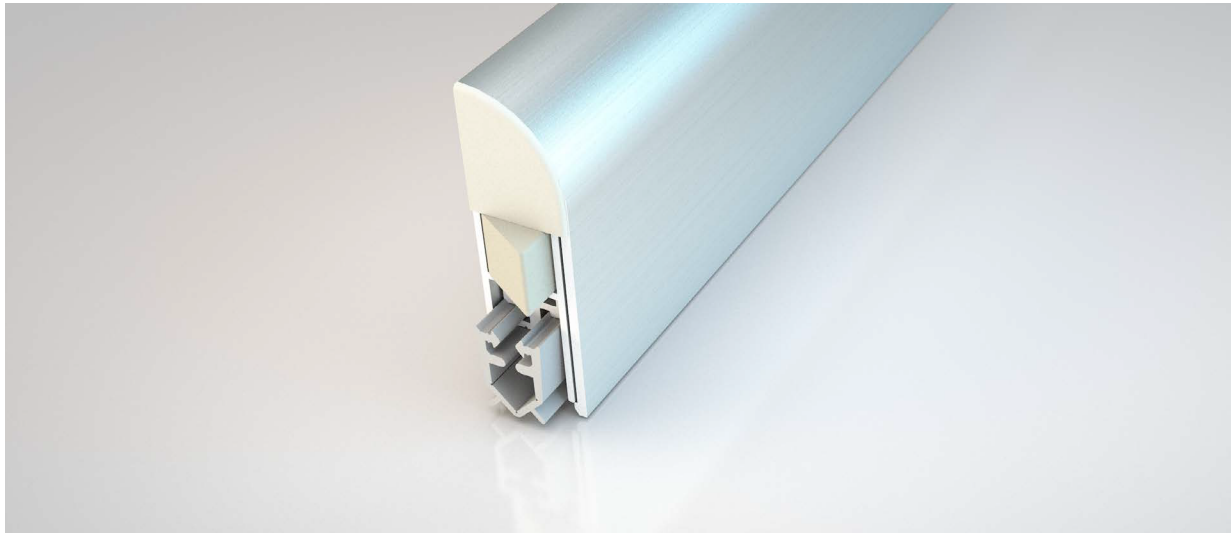

Application

Bottom edge of acoustic timber or metal doorsets

Fixing

Screw-fixed

Performance

Meets smoke requirements BS 8214
Acoustically tested in accordance with
BS EN ISO 10140-2

Material

Aluminium (Satin Silver), PVC gasket (Grey)

Lengths (mm)

400, 500, 600, 700, 800, 900, 1000, 1100, 1200

Cutback (mm) / Maximum gap coverage (mm)

125, 130 (400 length only) / 12


Actuation

Single

Order codes

NOR820 + Length + /S eg. NOR820400/S (400mm)

Dimensions



Installation of the NOR820 drop seal provides smoke and acoustic performance without the removal of timber from the door. Fitting of the seal is not detrimental to the doors performance for fire resistance.

Door manufacturers such as Falcon Strebord, Halspan, Flamebreak etc advise: Surface mounted automatic drop seals may be used where the fitting of these does not require the removal of any core material.

 5 Regents Drive
Prudhoe
Northumberland
NE42 6PX



norseal.co.uk



sales@norseal.co.uk



01661 830088

Registered in Companies House Cardiff No. 04317595 VAT Reg. No. 733 9466 08