

ELECTROMAGNETIC DOOR CLOSERS

Responder 24

Power Supply Unit

Please see page 55
for more detail.



ELECTROMAGNETIC DOOR CLOSERS

Responder 24

Offering Hold-Open & Swing-free modes, and being fully universal fitting with left, right, push & pull available from one box, the Responder 24 is a highly adaptable closer, suitable for use in varying applications, from care-home scenarios where swing-free is in demand, to airports and schools, where high-traffic passes through a door.

- Electromagnetic technology ensuring safe closure in a fire alarm activation
- 5 Finishes available for next day delivery
- Fire tested to EN1634-1 standard



3rd Party
Certification



Opening Angle
150°



Two-Stage
Speed Regulation



Guarantee



Max Door
Width



Max Door
Weight



Finishes

See page 98 for more detail



SE
Silver



SNP
Satin Nickel



PNP
Polished Nickel



PVD
Polished Brass



AB
Antique Brass



Certification
✓✓✓



1720





1812

Product Features

Responder 24

Delayed Action	-
Back Check	-
Opening Angle	150°
Fig.1 Pull Side Door Width	385-1100mm
Fig.66 Push Side Door Width	502-1100mm
Max Door Weight	<80kg
Power Adjustment	-
Hold Open	o
Dimensions (including cover)	W307 x H67 x D95mm
Certification Compliance	
Certifire	-
UKCA	✓
CE	✓
BS EN 1154	✓
BS EN 1155	✓
BS EN 1634	✓
UL10C	-
UL228	-
ANSI BHMA	-
IFCC	✓

Key: ✓ Yes - No o Option

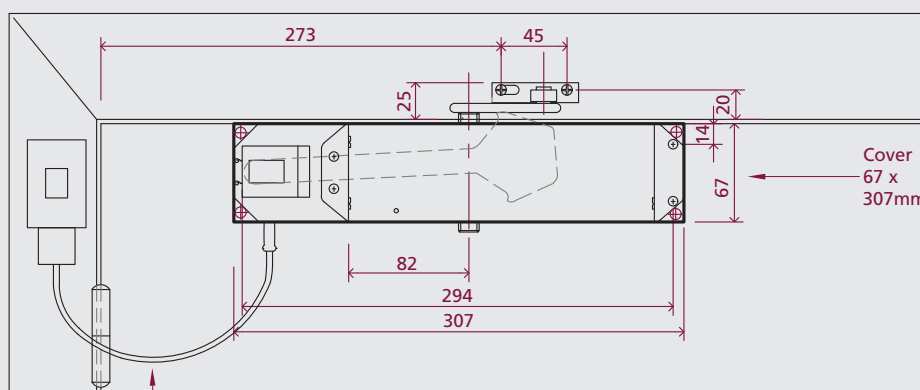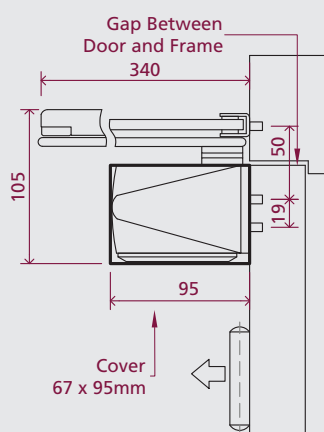

When E-mag door closers are to be interfaced with fire & smoke alarm systems they are to be installed by competent installers in accord with BS 7273-4 code of practice.

All dimensions shown are in mm.

For fitting instructions see website